

SafEye

300 SERIES GAS DETECTION SYSTEMS FOR

AIR DUCT



- **FASTER RESPONSE AND MORE RELIABLE RESULTS**
- **MORE EFFECTIVE AND MORE ECONOMICAL...**

Compared to 'Point' Type Detectors or 'Sample Draw' Systems!

RELIABLE HIGH SPEED DETECTION



MAIN FEATURES



HIGH SENSITIVITY

- Alarm up to 0.5 LEL.m
- 5 times more sensitive than the normal Open Path equipment

FAST RESPONSE

- Fast response time of 2 seconds.
- 5 to 10 times faster than the commonly used Open Path detector and 20-50 times faster than the Point Detector.

LOW MAINTENANCE

High reliability, simple installation, alignment and maintenance, equipment not subject to poisoning.

PROVEN TECHNOLOGY

Used in air ducts on FPSO's and offshore rigs for British Petroleum (BP), Shell and ABB Lummus for turbines, air intakes, etc.

HARSH ENVIRONMENT

Specially designed to perform under extreme conditions such as high-speed airflows, high temperatures (up to 158°F (70°C)), humidity and corrosive gases, where point detectors may not be effective.

STANDARD INTERFACE OPTIONS

Standard 4-20 mA outputs or RS-485 output to allow networking (up to 64 detectors) to a central monitoring/PC system.

This feature also enables easy maintenance, local and remote diagnostic tools.

SafEye 300 Duct Open Path Detectors were specially designed and are widely used to monitor and alarm against ingress of hazardous gas concentrations into air intakes of turbine engines and HVAC air ducts. Formation and migration of gas clouds and their possible penetration into safe places, control rooms, turbine engines, etc. is a substantial risk that needs to be addressed.

Users, designers and safety and operational engineers are increasingly required to provide for adequate and fast detection and alarm to protect these hazards.

For duct applications, over a small path across an air inlet, the system is designed to respond with a very high sensitivity, full scale of 1 LEL.m for 2-6.6 ft. (0.6-2 m) wide inlet and full scale of 2.5 LEL.m for 6.6-23 ft. (2-7 m) wide inlet.

The SafEye 300 Duct system, due to its special optics design, provides for a misalignment tolerance of 2° in all directions and is protected against false gas reading and alarms which are caused by partial obscuration and blocking, misalignment, vibration, flexing or tilts.

Each SafEye unit is factory calibrated in a temperature cycle run at the entire operating temperature range. The temperature compensating mechanism allows correct operation in changing and extreme temperatures while maintaining the system's accuracy. Its internal microprocessor will automatically compensate for low signals with its internal Automatic Gain Control (AGC).

The SafEye 300 Duct system can be factory calibrated to gas mixtures that are associated with offshore production and processing and onshore installations.



GENERAL SPECIFICATIONS

Detected Gases	Simultaneous detection of C1-C8 flammable gases		
Detection Range and Response Time	Model	301DS	302DS
	Distance	2-11.5ft (0.6-3.5m)	9.9-49.5ft (3-15m)
	Response Time	2 sec.	5 sec.
Immunity to False Alarm	Not influenced by solar radiation, hydrocarbon flames, other external IR radiation sources, high airflows and high loaded streams		
Spectral Response	3.0-4.0 μ m		
Sensitivity Range	0-2.5 LEL.m Standard; 0-1 LEL.m by dip-switch setting		
Misalignment Tolerance	$\pm 2^\circ$		
Drift	Long-term $\pm 5\%$ of full scale		
Temperature Range	-40°F (-40°C) to 158°F (70°C)		

ELECTRICAL SPECIFICATIONS

Power Supply	24 VDC (18-32 VDC)		
Power Consumption	Detector:	150mA @ 24 VDC (200 mA Peak)	
	Source:	100mA @ 24 VDC (220 mA Peak)	
Electrical Connection	2 x 3/4" - 14NPT conduits or 2 x M25 x 1.5 mm ISO		
Electrical Input Protection	According to MIL-STD-1275B		
Electromagnetic Compatibility	EMI/RFI protected CE Marked		

OUTPUTS

0-20mA Sink (source option) configuration	Maximum load	600 Ω at 18-32 VAC		
	4-20mA	Gas reading		
	4mA	Normal, zero reading		
	2mA	Obscuration/misalignment /beam block		
	1mA	Zero calibration mode		
	0mA	Fault		
HART Protocol (models 301DS & 302DS)	HART communications on the 0-20mA analog current (FSK) - used for maintenance, configuration changes and asset management			
RS-485	The RS-485 input/output provides complete data information to a PC and receives control commands from the PC or handheld unit			
Relays		Type	Normal Position	Maximum Ratings
	Alarm	SPDT	NO, NC	2A at 30 VDC or 0.5 at 250 VAC
	Accessory	SPST	Open	5A at 30VDC or 250VAC
	Fault	SPST	Closed	5A at 30VDC or 250 VAC

MECHANICAL SPECIFICATIONS

Dimensions	5.2" (132mm) x 5.2" (132mm) x max. 4.7" (120mm)		
Weight	Al. Encl.	Detector: max 8.7 lb (3.7 kg)	Source: max 8.58 lb (3.9 kg)
	St. Encl.	Detector: max 13.4 lb (6.1 kg)	Source: max 13.84 lb (6.3 kg)
Mechanical Design	The standard detector housing is heavy-duty, copper-free (less than 1%) aluminum. The housing is finished in white epoxy enamel and is also available in 316 Stainless Steel		
Environmental Standards	Meets MIL-STD-810C for Humidity, Salt & Fog, Vibration, Mechanical shock, High Temp, Low Temp		
Water and Dust Tight	IP66 and 67 per EN60529 NEMA 250 6P		

HAZARDOUS AREA APPROVALS

ATEX	301DS, 302DS	SIRA 00ATEX 1161, EX II 2G EExd IIB + H2 T5 (70°C) SIRA 00ATEX 1165, EX II 2G EExde IIB + H2 T5 (70°C)
UL	301DU, 302DU	UL No. E209870, Class I Groups C and D Hazardous Location
FM	301DF, 302DF	Class I, Division 1, Groups B, C and D, Dust Ignition proof for Class II, Division 1, Groups E, F and G. Performance per Class no. 6325

RELIABILITY APPROVALS

TUV (SIL-2)	301DS, 302DS	968/EZ 443.00/10
--------------------	--------------	------------------

ACCESSORIES

The following optional accessories designed for the SafEye system are available.


Duct Mounting

The duct mount interfaces between the detector and the duct surface.

The duct mount enables the detector's alignment up to 3° in all directions (P/N 794716).

Commissioning / Alignment Kit for standard and duct type units is required for commissioning and future maintenance checks. Only one kit is required per site.

The kit includes an Alignment Telescope P/N 794110, a Magnetic Mode Selector P/N 790285 and a Function Check Filter P/N 794220-1÷5 for system testing along with socket keys for access to units (P/N 792247).

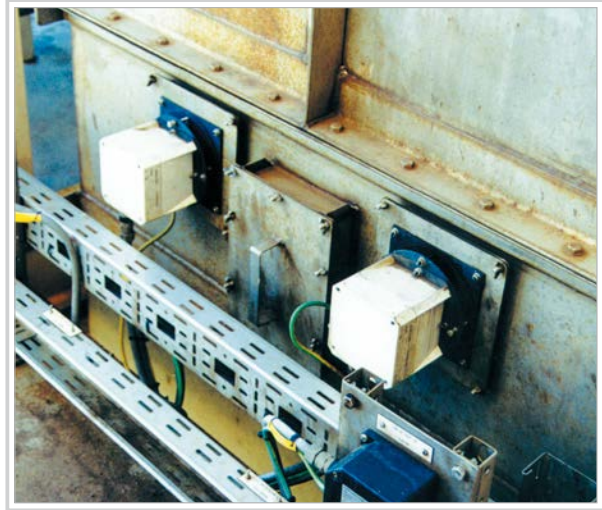

Air Duct Installation on ETAP Platform in the North Sea

TYPICAL APPLICATIONS

Offshore Oil & Gas Rigs and FPSOs; Onshore Oil & Gas Terminals; Storage Farms and Filling Stations; Petrochemical and Chemical Industries; Power Utilities and Turbines areas; Automotive, Painting, Printing, Pharmaceutical Industries and many more...

Specific applications include:

- HVAC ducts (Heating Ventilation Air Conditioning) in accommodations areas
- Air ducts in process areas
- Stacks and exhaust towers
- Compressors and generators enclosures
- Curing ovens and drying equipment, printing equipment
- Engine & Turbine air intake and exhaust
- Air intake to safety enclosures
- Paint-booths and paint production and drying processes
- Air ventilation shafts

CONTACT INFORMATION



HEADQUARTERS

218 Little Falls Road
Cedar Grove, NJ 07009
USA

Tel: +1 (973) 239-8398
Fax: +1 (973) 239-7614

www.spectrex.net
spectrex@spectrex.net

YOUR LOCAL SPECTREX OFFICE:

TEXAS (USA)

Mr. Jay Cooley
Regional Sales Manager

16203 Park Row, Suite 150
Huston, Texas 77084
USA

Tel: +1 (832) 321-5229
jay@spectrex.net

EUROPE

Mr. Ian Buchanan
Regional Manager

6 Applecross Road
Glasgow G66 3TJ
UK

Tel: +44 (0) 141 578-0693
ian@spectrex.net

FAR EAST

Mr. Deryk Walker
Regional Sales Manager

59 Fen Ji Hu, Danshui
Taipei Country 25163, Taiwan (ROC)

Tel: +886 2 8626-2893
Cel: +886 926 664-232
deryk@spectrex.net

Represented by: